


**TERPS
INSTRUMENT DEPARTURE CHART**

AD ELEV 252

**SID RWY 28
BARDUFOSS (ENDU)**

ATIS 129.725	BARDUFOSS TWR 118.100 122.100 280.700 257.800X				BARDUFOSS APP 118.800 125.850 275.300 397.375X						
BODO CONTROL 126.450 278.050		RWY 28	Knots 60	60	120	180	240	300	360	to	reason
			V/V (fpm)	515	1030	1545	2060	2575	3090	7000	TERRAIN

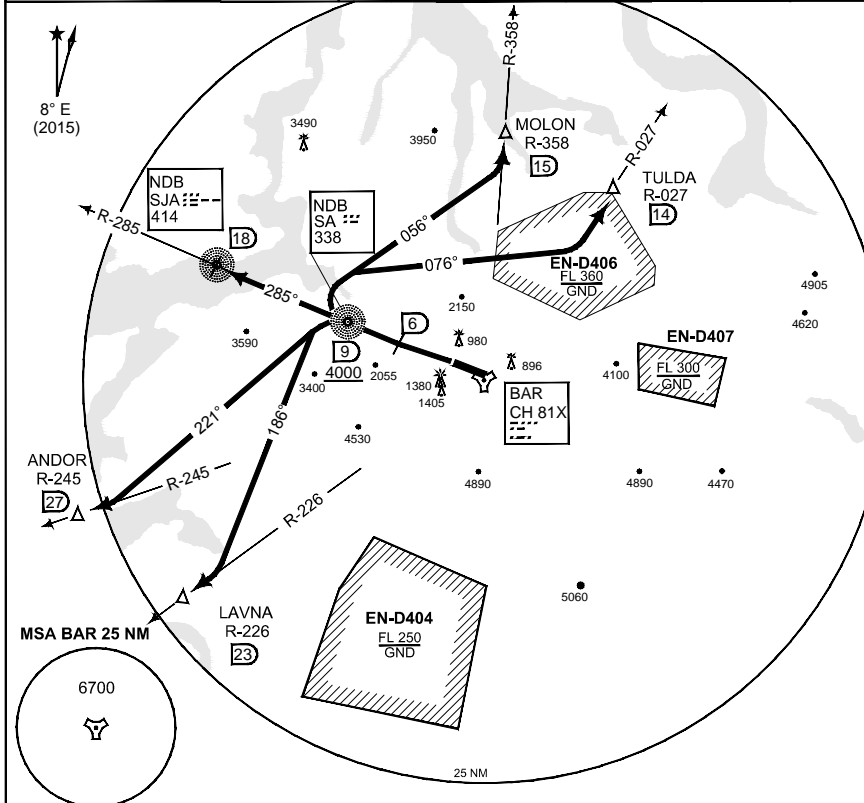

SAFE ALT 100 NM 9300

RWY 28 INITIAL CLIMB:

Climb on 281° to 6 DME BAR. Continue outbound on BAR R-285 to 9 DME (SA NDB). Minimum altitude at 9 DME is 4000 ft. Then:

TA 7000

TACAN ANDOR:	Turn left 221° - intercept BAR R-245 to ANDOR. Climb to FL 150. (FL 150 for BAR TACAN coverage. 7000 ft required for terrain).
TACAN LAVNA B:	Turn left 186° - intercept BAR R-226 to LAVNA. Climb to minimum 7000 ft.
TACAN MOLON:	Turn right 056° - intercept BAR R-358 to MOLON. Climb to minimum 7000 ft.
TACAN SENJA:	Continue on BAR R-285 to 18 DME (SJA NDB). Climb to minimum 7000 ft.
TACAN TULDA B:	Turn right 076° - intercept R-027 to TULDA. Climb to minimum 7000 ft.

CHANGES: EDITORIAL

RNOAF 23 JUL 2015

SID RWY 28

69°03.35' N
018°32.42' E

BARDUFOSS (ENDU)